

# Simple Extended Consensus Resolution: Uncle Mining On The Blockchain

Thaer Khawaja  
thaer.khawaja@gmail.com  
www.getmasari.org

## Abstract

Since Bitcoin’s inception and introduction of cryptocurrency[1], alternative iterations of permissionless decentralized peer-to-peer electronic cash have been developed. However, many of these Bitcoin-inspired systems subsequently share with it properties that result in similar on-chain scalability limitations. With the introduction of the SECOR protocol, we propose a simple version of Uncle Mining, serving the purpose of faster block emission rates while further securing the network by rewarding miners for otherwise-orphaned blocks, solving in part some of the inherent scalability limitations of blockchain technology. These added properties are achieved by introducing block weight and differentiating it from block difficulty in a hash-based proof-of-work (PoW) system that achieves consensus via the heaviest chain in the network.

## 1 Introduction

Since the introduction of Bitcoin, the scalability of permissionless decentralized cryptocurrency systems has been put into question, with different on-chain and off-chain solution proposals introduced in the space. When looking at on-chain scalability protocols, block emission rates become very important as they’re necessary for consensus. If blocks are emitted too quickly, the network will be unable to converge to a consistent global state. Conversely, if blocks are emitted too slowly, the network will be slow to update state and at scale will have the problem of very large blocks congesting the payloads being broadcasted; at some point the blocks become too large for consensus when propagation times exceed that of a given emission rate. To help with on-chain scalability, a protocol such as SECOR is needed for achieving an optimal emission rate with security measures in place to maintain consensus. When implemented, it would in turn deliver faster blocks and higher network security as it takes advantage of what would otherwise be stale orphaned blocks not accepted into the network.

## 2 Simple Extended Consensus Resolution (SECOR)

We define the blockchain as a directed acyclic graph  $G = (V, E)$ , containing the active main chain and the set of all alternative chains, with each vertex  $v$  following the notation  $\overset{\text{uncle}}{\underset{\text{parent}}{v}}_{\text{current height}} \text{ block}$ . The main chain corresponds to the max weighted path  $W$  from the genesis block  $v_0$  to the latest block at  $v_h$ , with  $h$  representing the current chain height at the max weighted path of  $G$ , where  $W = \sum_{i=0}^h \text{weight}(v_i)$ . The weight of a block  $v_i$  corresponds to the computed difficulty for mining it plus the difficulty of a mined uncle. An uncle mined on the main chain is an alternative block  $v_{h-1}^a$  with a sibling  $v_{h-1}^m$  on the main chain,  $a \neq m$ , distinct solutions at height  $h - 1$ , and a nephew block  $\overset{a}{\underset{m}{v}}_h$  is referencing the uncle  $a$  with its parent  $m$ .

### 2.1 Properties of a Valid SECOR Uncle

#### 2.1.1 Common Ancestry

At least one of these two cases must be present for a valid uncle.

**Direct Ancestry.** The grandparent  $v_{h-2}^\gamma$  of candidate nephew block  $v_h$  must be the same direct ancestor reference in parent  $v_{h-1}^m$  and uncle  $v_{h-1}^a$ .

**Extended Ancestry.** This scenario is allowed at  $h + 1$  when there are two candidate top blocks  ${}^a_m v_h^i$  and  ${}^m_a v_h^j$ ,  $i \neq j$ , where the parent of  $v^i$  is the uncle  $v^j$ , the parent of  $v^j$  is the uncle of  $v^i$ , and the grandparent  $\gamma$  is the same direct ancestor of those two blocks. This double reference ensures these are publicly known alternative paths, and by direct ancestry to grandparent  $\gamma$  it ensures this uncle mining case for the active main chain is publicly known.

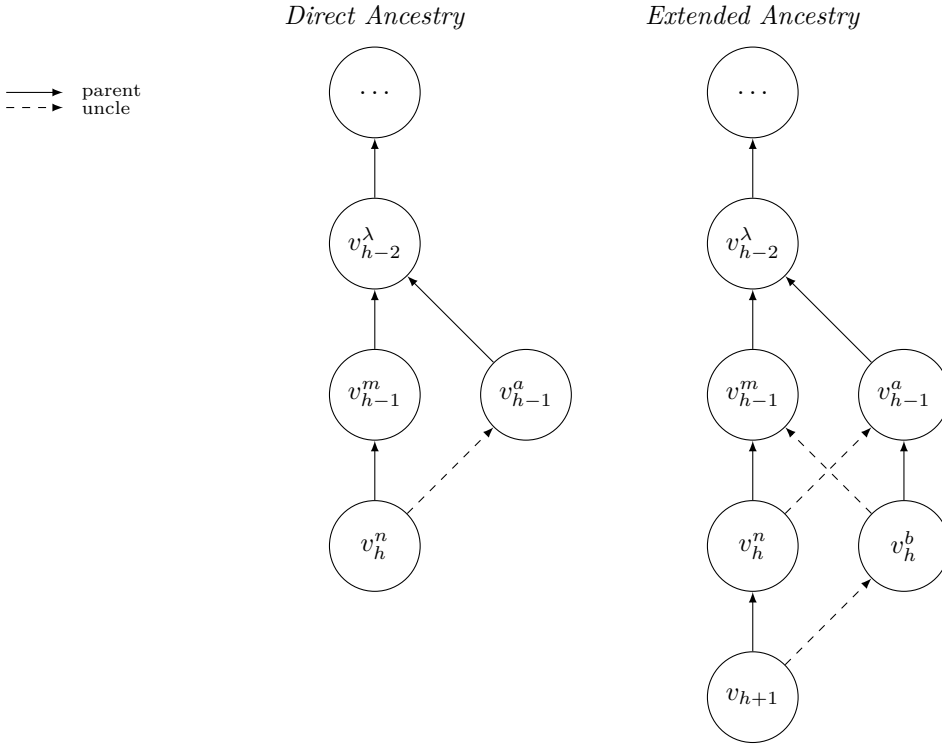


Figure 1: SECOR Ancestry Cases

### 2.1.2 Correct Uncle Reference

The computed hash that represents new top nephew block  ${}^a_m v_h^n$  must include in it the hash of uncle  $hash(v_{h-1}^a)$  to ensure that the reward given to the uncle is valid relative to its coinbase output. The uncle coinbase reward  $r^a$  must be a defined constant fraction of the original amount in order to disincentivize adversarial uncle mining, and a fraction must be rewarded to the nephew reward  $r^n$ .

### 2.1.3 Near Time Constraint

In order to avoid any potential time warp attacks in the set of timestamps, the uncle block's timestamp  $t_a$  must be within a defined delta from the parent timestamp  $t_m$  that is reasonable relative to block propagation statistics - this assumes the clock drift in nodes of the network are minimal, and is only to be enforced with a supporting block emission rate  $T$  (i.e. the maximum delta for  $T = 60$  could be  $|t_a - t_m| < T/4$  which is sufficient given block propagation delays).

## 3 Features of a SECOR Enabled Network

### 3.1 Faster Block Emission Rates.

#### 3.1.1 15 Second Blocks.

This is constrained by hardware limitations, and we can use Bitcoin as reference on network block propagation performance, where each KB costs an additional 80ms delay until the majority knows about the block, with 95% of nodes have observed the broadcast within 40 seconds, and an overall mean of 12.6 [2]. More recent Bitcoin statistics give improved and converging results, with a 50th percentile (p50) mean of 3.7 seconds, p90 mean of 17.5, p90 median of 15.7, and a max p90 value of 48.5, when looking at recent data with saturated blocks (2016-04-05, 2017-04-05) [3]. Therefore, when controlling block size and compute costs, it's arguable that block emission rates as low as 15 seconds are sufficient for consensus, with SECOR as a protection measure against outliers and adversaries.

#### 3.1.2 Smaller Blocks.

This is important with projects such as those using the CryptoNote protocol providing dynamically adjustable block sizes, where there is a larger constant associated with the transactions proofs involved [4]. SECOR's ability to safely increase block emission rates helps with propagation as it would introduce less latency into the system. There is a balance, however, as too fast of an emission rate can introduce many empty blocks where their coinbase transactions could help with statistically significant analysis on traceability of normal transactions.

### 3.2 Improved Network Security.

#### 3.2.1 Heaviest Chain Consensus.

While consensus in a traditional PoW system is based off the greatest PoW effort invested, with cumulative difficulty  $D = \sum_{i=0}^h difficulty(v_i)$  determining the active chain in the network, using the cumulative weight  $W$  enables miners to effectively double the difficulty of a block every time an uncle is mined, resulting in  $W \geq D$ . Considering a rational adversary intentionally mining uncles, one is disincentivized as long as the uncle reward for doing so is less than mining sequential blocks, therefore any intentional uncle mining would be less profitable than mining on the main chain. With near-time uncle timestamp constraints, the difficulty computed from these alternative blocks would be very similar and any secretive mining following those produced blocks is reducible to adversarially mining two hidden subchains, which falls under the same exponentially decreasing probability of an attacker catching up as previously made analogous to the Gambler's Ruin problem[1].

#### 3.2.2 Uncle Rewards.

Rewarding miners for otherwise-orphaned blocks, incentivizes miners to participate in the protocol while at the same not biasing high performance network connections, and not significantly punishing those collaborating with low performing hardware.

## 4 Implementation Details

The first implementation of this protocol has been completed in the Masari Project, a CryptoNote based coin. The emission rate has been set to 60 seconds; it could be lower but a conservative value was opted for instead to minimize the frequency of uncles. The uncle timestamp constraint has been set to 1/4 of the target difficulty, a maximum 15 second delta of the parent's in this case which is within the p90 propagation median. We assume clock drift in the network for uncles is minimal, and synchronizing time through NTP is sufficiently reliable for dependency in SECOR without raising any centralization concerns since it is a secondary mining protocol. The uncle reward ratio has been set to 1/2 of the base reward, while the nephew receives a fee of 1/20 the base reward; these numbers are relatively arbitrary however are sufficient as

disincentive to adversarial uncle mining due to the decreased reward. The weight supplementation adds the entire difficulty of the uncles being mined, and difficulty algorithm adjustments in this first implementation are retained to be calculated through difficulty alone.

## 5 Additional Related Work

Initial inspiration of this protocol was from the GHOST and DECOR protocols, where their main focus differed slightly from SECOR's due to seeking for consensus using emission rates nearing or faster than hardware limitations, needing to account for multiple uncles at a given height and the efficiency rates of a network implementing it[5][6][7]. With the introduction of SECOR, the distinction is simplicity due to future research that looks to further increase throughput without needing to optimize past hardware limitations.

## 6 Conclusion

This paper presented SECOR, a simple uncle mining protocol which can deliver fast block emission rates and higher network security, optimizing propagation rates with smaller higher frequency blocks. The tight coupling of uncle references within the chain and only allowing a single uncle reference per block limits adversarial attacks as they become synonymously equivalent to 51% attacks. The distinction of weight from difficulty allows separation of difficulty calculation in adjustment algorithms, from cumulative weight that would otherwise determine the active main chain.

Additional research is needed to further optimize mining by partitioning the main chain into dynamically adjustable shards, where the block tree of alternative chains is distinct from the block tree of active main sub-chains, redefining the Blockchain as the Blocktree. This future work would further split individual block difficulty into smaller units, bypassing the converging hardware limit on block emission rates, and allowing one to set a maximum block size without worry of network congestion or high transaction fees. This has the advantage of further improving block propagation throughput, and increasing decentralization of compute due to smaller mining pools being able to more consistently mine blocks and incentivize miners away from the bigger pools.

## References

- [1] Nakamoto, S. *Bitcoin: A Peer-to-Peer Electronic Cash System*. [bitcoin.org/bitcoin.pdf](https://bitcoin.org/bitcoin.pdf) (2008)
- [2] Decker, Christian., Wattenhofer, Roger. *Information Propagation in the Bitcoin Network*. [tik.ee.ethz.ch/file/49318d3f56c1d525aabf7fda78b23fc0/P2P2013\\_041.pdf](https://tik.ee.ethz.ch/file/49318d3f56c1d525aabf7fda78b23fc0/P2P2013_041.pdf) (2013)
- [3] BitcoinStats. *Data Propagation, 2013-11-22 to 2017-04-05*. [bitcoinstats.com/network/propagation/](https://bitcoinstats.com/network/propagation/)
- [4] Saberhagen, Nicolas. *CryptoNote v 2.0* <https://cryptonote.org/whitepaper.pdf> (2013)
- [5] Sompolinsky, Y., Zohar, A. *Secure High-Rate Transaction Processing in Bitcoin*. [eprint.iacr.org/2013/881.pdf](https://eprint.iacr.org/2013/881.pdf) (2015)
- [6] SDLerner. *Even faster block-chains with DECOR protocol*. [bitslog.wordpress.com/2014/05/02/decor/](https://bitslog.wordpress.com/2014/05/02/decor/) (2014)
- [7] Ethereum, Blog. *More uncle statistics*. [blog.ethereum.org/2015/09/25/more-uncle-statistics/](https://blog.ethereum.org/2015/09/25/more-uncle-statistics/) (2015)